




66 series

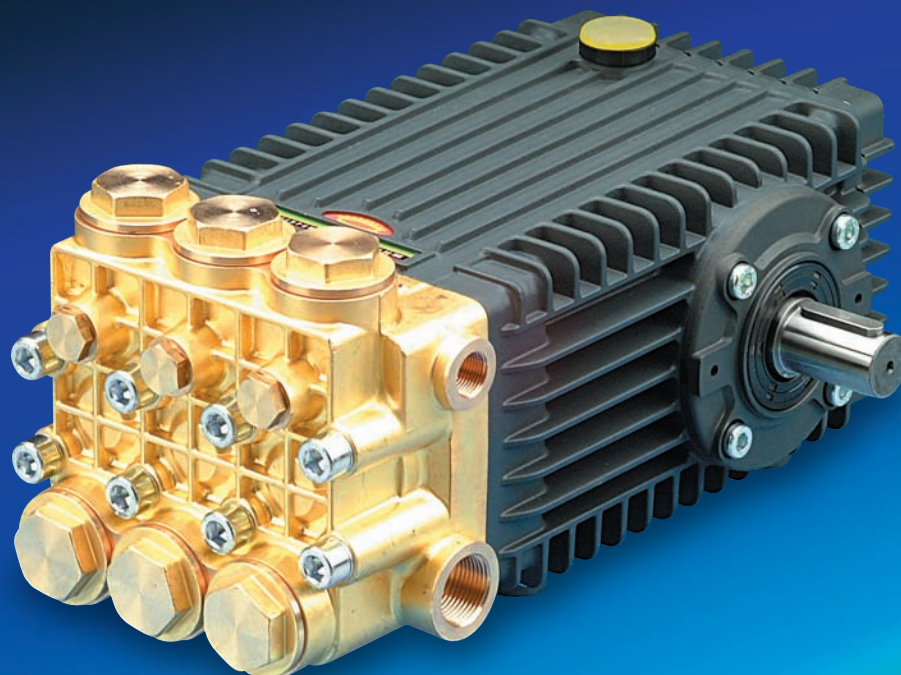

Pump type Type de pompe Pumpentype Tipo de bomba Tipo di pompa	Flow rate Débit Förderleistung Caudal Portata		Max. pressure Pression Druck Presión Pressione			r.p.m. tr./min. u.p.m. r/min. g./min.	Power Puissance Leistung Potencia Potenza		Weight Poids Gewicht Peso Peso	Inlet Entrée Eingang Entrada Entrata	Outlet Sortie Ausgang Salida Uscita	Dimensions Dimensions Dimension Dimensiones Dimensioni
	l/min.	G.P.M. (U.S.A.)	bar	MPa	p.s.i.		kW	hp				
W3021 (*)	21	5.55	300	30	4350	1450	11,8	16	18,5	G 3/4 F	G 3/8 F	341x249x160
W2525 (*)	25	6.6	250	25	3625		13,23	18		G 3/4 F	G 3/8 F	
W3025 (*)	25	6.6	300	30	4350		14,7	20		G 3/4 F	G 3/8 F	
W2030 (*)	30	7.92	200	20	2900		11,02	15		G 3/4 F	G 3/8 F	
W2035	35	9.25	200	20	2900		13,23	18		G 3/4 F	G 3/8 F	
W2141	41	10.83	210	21	3045		16,17	22		G 3/4 F	G 3/8 F	
W1550 (*)	50	13.21	150	15	2180		14,7	20		G 3/4 F	G 3/8 F	
T3025 (*)	25	6.6	300	30	4350	1750	14,70	20	18,5	G 3/4 F	G 3/8 F	341x249x160
T2530 (*)	30	7.92	250	25	3625		14,70	20		G 3/4 F	G 3/8 F	
T2830 (*)	30	7.92	275	27,5	4000		15,50	21		G 3/4 F	G 3/8 F	
T2535	35	9.25	250	25	3625		16,17	22		G 3/4 F	G 3/8 F	
T2040	40	10.56	200	20	2900		15,44	21		G 3/4 F	G 3/8 F	
T1750	50	13.20	172	17,2	2500		16,17	22		G 3/4 F	G 3/8 F	

(*) Available on request in version with double-sided shaft / Disponible sur requête en version avec arbre à double sortie / Auf Wunsch lieferbar in Version mit Doppelwellenausgang / Disponible bajo pedido en versión con doble salida de eje / Disponibile su richiesta in versione con albero a doppia presa di forza

66 H.P. series



NEW W5018
T5018

Pump type Type de pompe Pumpentype Tipo de bomba Tipo di pompa	Flow rate Débit Förderleistung Caudal Portata	G.P.M. (U.S.A.)	Max. pressure Pression Druck Presión Pressione	r.p.m. tr./min. u.p.m. r/min. g./min.	Power Puissance Leistung Potencia Potenza	Weight Poids Gewicht Peso Peso	Inlet Entrée Eingang Entrada Entrata	Outlet Sortie Ausgang Salida Uscita	Dimensions Dimensions Dimension Dimensiones Dimensioni
	l/min.		bar MPa p.s.i.		kW hp	kg			mm
W4015 (*)	15	3.96	400 40 5800	1450	11,02 15	19,5	G 1/2 F	G 3/8 F	350x244x159
W5015 (*)	15	3.96	500 50 7250		14,70 20		G 1/2 F	G 3/8 F	
W4018	18	4.75	400 40 5800		14,70 20		G 1/2 F	G 3/8 F	
W4518	18	4.75	450 45 6225		15,44 21		G 1/2 F	G 3/8 F	
W5018	18	4.75	500 50 7250		17,40 24		G 1/2 F	G 3/8 F	
W3521 *	21	5.55	350 35 5075		14,70 20		G 1/2 F	G 3/8 F	
W3523	23	6.07	350 35 5075		14,70 20		G 1/2 F	G 3/8 F	
T4018 *	18	4.75	400 40 5800	1750	14,70 20	19,5	G 1/2 F	G 3/8 F	350x244x159
T5018 *	18	4.75	500 50 7250		17,40 24		G 1/2 F	G 3/8 F	

(*) Available on request in version with double-sided shaft / Disponible sur requête en version avec arbre à double sortie / Auf Wunsch lieferbar in Version mit Doppelwellenausgang / Disponible bajo pedido en versión con doble salida de eje / Disponibile su richiesta in versione con albero a doppia presa di forza